


**Static/Fatigue Rated
Low Profile Tension & Compression
LOAD CELL**

**DSCC
Series**

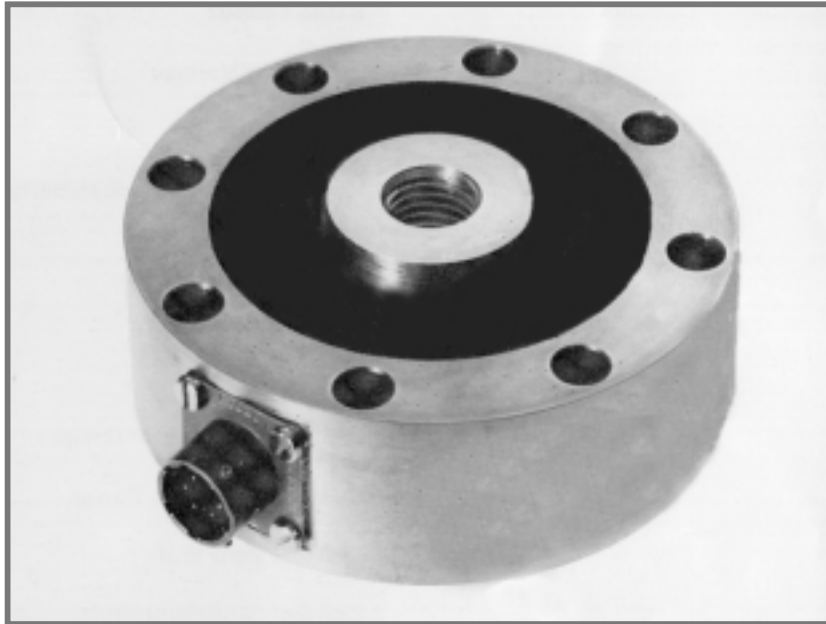

- Capacities 5kN to 1000kN
- Stainless Steel Construction
- Low Profile Shear Design
- Low Deflection
- High Natural Frequency
- Excellent Rejection of Extraneous Forces
- Optionally Fatigue Rated to 10^9 Fully Reversed Full Range Cycles
- Shunt Calibration Facility
- **3 YEAR WARRANTY**

Options Available

Other Ranges Available on request

Higher Accuracy Versions available (consult factory)

Equivalents to other manufacturers' available

Full range of mounting options available, including:-

- Load Buttons
- Spherical Rod End Bearings
- Standard and Special Mounting Base

Different Centre Thread Sizes (consult factory)

Integral Cable Versions (consult factory)

Double Bridge Versions

DESCRIPTION

The DSCC series low profile pancake type load cells are suitable for both Weighing and Force Measurement applications.

Constructed from Stainless Steel to give the best performance whilst still offering a very attractive looking product.

The load cell's design provides excellent resistance to extraneous forces, such as bending, side and torsional forces.

The load cell is used widely in material and fatigue testing applications, where a low physical height is required and forces are applied axially. High frequency response is also a benefit with this load cell for dynamic force measurement applications, which is also complimented with excellent fatigue resistance.

As with all the other Applied Measurements sensors, they can be supplied complete with monitoring/control electronics and calibrated as a system (please refer to the Instrumentation datasheets).

Transducer Specialists...

APPLIED MEASUREMENTS LIMITED

3 MERCURY HOUSE - CALLEVA PARK - ALDERMASTON - BERKSHIRE - RG7 8PN - UK


Tel: (+44) 0118 981 7339 Fax: (+44) 0118 981 9121 email: info@appmeas.co.uk Internet: www.appmeas.co.uk



SPECIFICATION

CHARACTERISTICS	DSCC	UNITS
Rated Capacities (Dynamic):	±5, ±10, ±25, ±50, ±100, ±200, ±500, ±1000	kN
Rated Output:	2.0 ±0.25%	mV/V
Non-Linearity:	<0.05	mV/V
Repeatability:	<0.05	±% of Rated Output
Hysteresis:	<0.05	±% of Rated Output
Symmetry (tension/compression):	<0.25	% of Rated Output
Zero Balance:	<1.0	±% of Rated Output
Temperature Range: Operating	-20 to +80	±% of Rated Output
Compensated	0 to +70	°C
Temperature Effect: On Output	<0.005	°C
On Zero	<0.005	±% of Applied Load/ °C
Safe Overload:	150	±% of Rated Capacity/ °C
Ultimate Overload:	300	% of Load Rating
Safe Sideload	50	% of Load Rating
Excitation Voltage:	10 recommended (15 max.)	% of Load Rating
Input Impedance:	700	Fully Reversed Cycles
Output Impedance:	700	Volts AC or DC
Insulation Impedance:	>500	Ohms
Deflection at Rated Capacity:	<0.1	Ohms
Construction:	Stainless Steel	Megaohms @ 100 VDC
Environmental Protection:	IP65	mm at Rated Load
Connections:	6 Pin Amphenol Connector	
Optional Fatigue Rated Version:	1.0mV/V output ±0.25%, rated to 10 ⁹ fully-reversed cycles	

All dimensions in mm

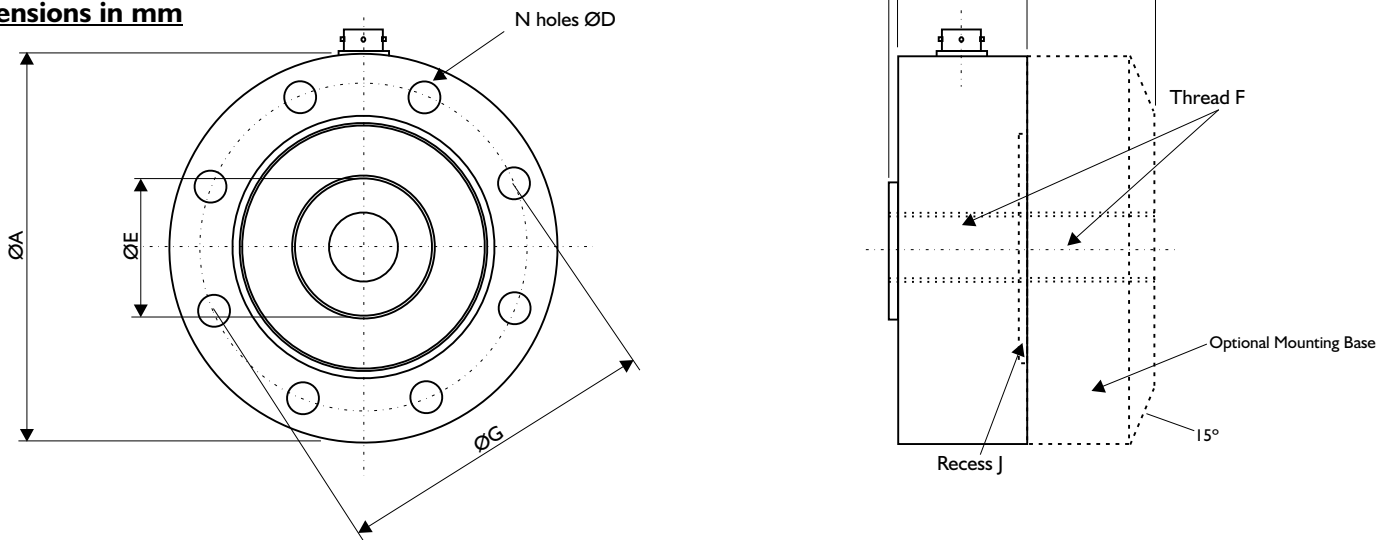

Range (kN)	ØA	B	C	ØD	ØE	Thread F	ØG	N	H	J
5, 10, 25, 50	107	2	33	8.5	33	M20 x 2.5	90	8 holes	35	2
100, 200	155	3	45	11	60	M36 x 2	130	12 holes	48	2
500, 1000	280	6	78	17	118	M64 x 6	230	16 holes	84	4

